

538,462

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/053286 A2

(51) International Patent Classification⁷: E21B 17/00

Serge, Mathieu [NL/NL]; Volmerlaan 8, NL-2288 GD Rijswijk (NL).

(21) International Application Number: PCT/EP2003/050991

(74) Agent: ZEESTRATEN, A., W., J.; Shell International B.V., Intellectual Property Services, P.O. Box 384, NL-2501 CJ The Hague (NL).

(22) International Filing Date:
12 December 2003 (12.12.2003)

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(26) Publication Language: English

Published:

- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR USE IN A BORE HOLE FOR AXIALLY COUPLING A TUBULAR END AND A MANDREL, AND A CONNECTING ASSEMBLY FOR SUCH A SYSTEM

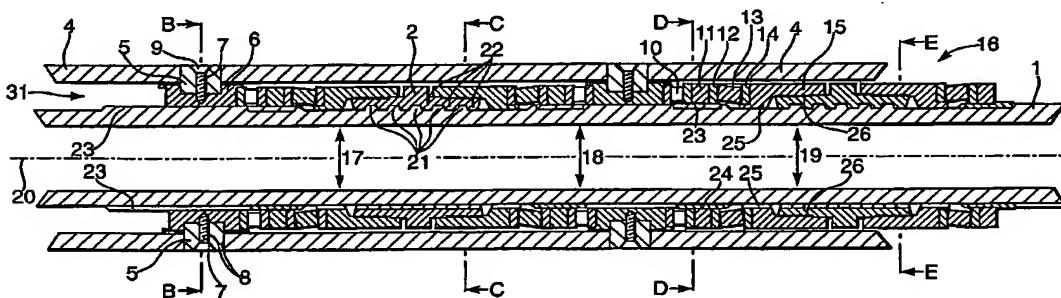

(57) Abstract: System for coupling two tubular ends for use in a well bore, the system comprising a first tubular end, a second tubular end for inserting into the first tubular end in axial alignment thereof, thereby forming an annular space between the first tubular end and the second tubular end, and a connecting assembly for axially coupling the first tubular end with the second tubular end whereby the connecting assembly at least partly reaches in the annular space.

WO 2004/053286 A2